


## HDS 10/20-4 M

Our new medium and super class hot water pressure washers do a first-class job of cleaning as well as also being extremely rugged and simple to operate.



**Order no.** 1.071-900.0

- Economical eco!efficiency mode
- Two detergent tanks
- Three-phase motor: water-cooled

### Technical data

<b>EAN code</b>		4054278134925
<b>Current type</b>	<b>Ph / V / Hz</b>	3 / 400 / 50
<b>Flow Rate</b>	<b>l/h</b>	500 - 1000
<b>Operating pressure</b>	<b>bar / MPa</b>	30 - 200 / 3 - 20
<b>Temperature (supply 12°C)</b>	<b>°C</b>	min. 80 - max. 155
<b>Power rating</b>	<b>kW</b>	7.8
<b>Consumption fuel oil</b>	<b>kg/h</b>	6.4
<b>Heating oil consumption, eco!efficiency</b>	<b>kg/h</b>	5.1
<b>Power cable</b>	<b>m</b>	5
<b>Fuel tank</b>	<b>l</b>	25
<b>Weight (with accessories)</b>	<b>kg</b>	168
<b>Weight incl. packaging</b>	<b>kg</b>	180
<b>Dimensions (L × W × H)</b>	<b>mm</b>	1330 × 750 × 1060

### Equipment

<b>Trigger gun</b>		EASY!Force Advanced
<b>High-pressure hose</b>	<b>m</b>	10 / Longlife
<b>Spray lance</b>	<b>mm</b>	1050
<b>Power nozzle</b>		■
<b>ANTI!Twist</b>		■
<b>Tanks for detergent, scale inhibitor and fuel can be filled from outside</b>		■
<b>Control panel with indicator lamps</b>		■
<b>Pressure switch control</b>		■
<b>Pole reversing plug (three-phase)</b>		■
<b>Electronic service control with LED display</b>		■
<b>Two detergent tanks</b>		■
<b>Dry running protection</b>		■

■ included in delivery.

This device requires instruction.




## Efficiency

- In the Eco setting the unit operates in the most economical temperature range (60°C) with full water flow.
- Burner cycles are optimised to reduce fuel consumption by up to 20% compared to full-load operation.



## Maximum efficiency

- Highly efficient burner technology.
- 4-pole electric motor with 3 piston axial pump.
- Water-cooled motor for a high level of performance and durability.

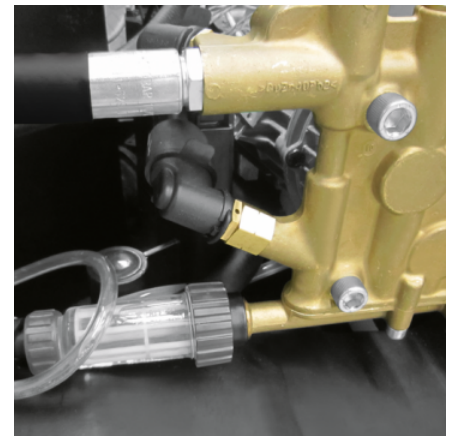

## Operational reliability

- The large, integrated fine-mesh water filter reliably protects the high-pressure pump against dirt particles.
- An integrated exhaust gas thermostat switches off the drive motor if the exhaust gas temperature exceeds 300°C.
- The soft damping system (SDS) compensates for vibrations and pressure surges in the high-pressure system.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>TRIGGER GUNS</b>				
<b>Trigger guns</b>				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	■
Conversion kit 1 from high pressure hose	2	4.111-050.0	A conversion kit which enables secure connection from an M22 hose onto our innovative EASY!Force trigger gun. The kit includes the EASY!Force Trigger gun, adaptors and lance.	□
Conversion kit 2 from device	3	4.111-051.0	Provides all the parts required to utilise our EASY!Force technology even on our non-Easy!Force machines. Including adaptors, lance, Easy!Force trigger gun and hose.	□
Conversion kit 3 only EASY!Force	4	4.111-052.0	A conversion kit for the EASY!Force gun, which includes the correct adaptors to connect to the M22 style lance and hose.	□
<b>Servo Control</b>				
Servo Control, 750 l/h - 1100 l/h	5	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	■
<b>SPRAY LANCES</b>				
<b>Rotating spray lances</b>				
Spray lance, 1050 mm, rotatable	6	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
LED nozzle light	7	2.680-002.0	LED work light for assembly on EASY!Force spray lances, providing a clear view in poor lighting conditions ensuring controlled cleaning results.	□
Spray lance, 250 mm, rotatable	8	4.112-027.0	250 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 400 mm, rotatable	9	4.112-024.0	400 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 600 mm, rotatable	10	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 840 mm, rotatable	11	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 1550 mm, rotatable	12	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance, 2050 mm, rotatable	13	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lance extender, 1000 mm	14	4.112-048.0	Spray lance extension with EASY!Lock connection. Length 1000 mm.	□

■ Included in delivery. □ Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>SPRAY LANCES</b>				
<b>Double lance</b>				
Double lance, 960 mm	15	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use ( e.g. stable cleaning).	<input type="checkbox"/>
<b>Angular spray lance</b>				
WC and gutter lance	16	4.112-029.0	Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	<input type="checkbox"/>
<b>Flexible spray lance</b>				
Flexible lance, 1050 mm	17	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	<input type="checkbox"/>
High pressure articulated joint	18	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	<input type="checkbox"/>
<b>Gutter cleaner</b>				
Gutter cleaning lance	19	2.112-015.0	The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	<input type="checkbox"/>
<b>Undercarriage spray lance</b>				
Underbody lance	20	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>
<b>Additional handle</b>				
Additional handle for EASY!Lock spray lances	21	4.321-380.0	Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task.	<input type="checkbox"/>
<b>KÄRCHER POWER NOZZLE</b>				
<b>Power nozzle spray angle 25°</b>				
Power Nozzle 25°, 052	22	2.113-024.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input checked="" type="checkbox"/>
<b>HP nozzle spray angle 0°</b>				
Power Nozzle 0°, 055	23	2.113-035.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
<b>Power nozzle spray angle 15°</b>				
Power Nozzle 15°, 055	24	2.113-047.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	<input type="checkbox"/>
<b>Power nozzle spray angle 40°</b>				
Power Nozzle 40°, 055	25	2.113-055.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>
<b>HIGH-PRESSURE HOSES</b>				
<b>Longlife 400 with unions on both sides</b>				
High-pressure hose Longlife, 10 m, 400 bar, 2 × EASY!Lock	26	6.110-038.0	Durable, 10 m long high-pressure hose (ID 8) with double steel reinforcement and EASY!Lock hand screw connection at both ends and ANTI!Twist. Approved for 400 bar pressure.	<input checked="" type="checkbox"/>
High-pressure hose Longlife, 1,5 m, 400 bar, 2 × EASY!Lock	27	6.110-024.0	1,5 m high-pressure hose (DN 8, M 22 × 1,5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1,5).	<input type="checkbox"/>
High-pressure hose Longlife, 30 m, 400 bar, 2 × EASY!Lock	28	6.110-023.0	With rotary coupling, 2 × M 22 × 1,5	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



28-30



31-34



35, 39, 41



36



37-38, 40



42

	Order no.	Description	
<b>HIGH-PRESSURE HOSES</b>			
<b>Longlife 400 with unions on both sides</b>			
High-pressure hose Longlife, 20 m, 400 bar, 2 × EASY!Lock	29	6.110-027.0 with rotary coupling, 2 × M 22 × 1.5	<input type="checkbox"/>
High-pressure hose Longlife, 15 m, 400 bar, 2 × EASY!Lock	30	6.110-029.0 With rotary coupling, 2 × M 22 × 1.5	<input type="checkbox"/>
<b>Standard with unions on both sides</b>			
High-pressure hose, 10 m, 315 bar, 2 × EASY!Lock	31	6.110-031.0 10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
High-pressure hose, 15 m, 315 bar, 2 × EASY!Lock	32	6.110-030.0 15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
High-pressure hose, 20 m, 315 bar, 2 × EASY!Lock	33	6.110-032.0 20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
High-pressure hose, 30 m, 315 bar, 2 × EASY!Lock	34	6.110-014.0 With rotary coupling, 2 × M 22 × 1.5	<input type="checkbox"/>
High-pressure hose, 15 m, 220 bar, 2 × EASY!Lock	35	6.110-042.0 15 m high-pressure hose M 22 × 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	<input type="checkbox"/>
High-pressure hose, 20 m, 220 bar, 2 × EASY!Lock	36	6.110-043.0 with union on both sides, M 22 × 1.5 with anti-kink protection. NW 10/155°C/220 bar	<input type="checkbox"/>
High-pressure hose, 25 m, 220 bar, 2 × EASY!Lock	37	6.110-044.0	<input type="checkbox"/>
High-pressure hose, 40 m, 220 bar, 2 × EASY!Lock	38	6.110-045.0	<input type="checkbox"/>
High-pressure hose, 15 m, 210 bar, 2 × EASY!Lock	39	6.110-059.0 High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 × 1.5 with anti-kink protection.	<input type="checkbox"/>
High-pressure hose, 40 m, 210 bar, 2 × EASY!Lock	40	6.110-060.0	<input type="checkbox"/>
High-pressure hose, 10 m, 220 bar, 2 × EASY!Lock	41	6.110-041.0	<input type="checkbox"/>
<b>Food industry version with unions on both sides</b>			
High-pressure hose food grade, 10 m, 250 bar, 2 × EASY!Lock	42	6.110-051.0 10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.



## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>HIGH-PRESSURE HOSES</b>				
<b>Food industry version with unions on both sides</b>				
High-pressure hose food grade, 20 m, 250 bar, 2 × EASY!Lock	43	6.110-052.0	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar.	<input type="checkbox"/>
<b>Longlife food industry version with unions on both sides</b>				
High-pressure hose food grade Longlife, 10 m, 400 bar, 2 × EASY!Lock	44	6.110-053.0	Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 × M 22 × 1,5	<input type="checkbox"/>
<b>Special hoses</b>				
High-pressure hose curved, 1.5 m, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	45	6.110-068.0		<input type="checkbox"/>
<b>INTERIOR CLEANING HEADS</b>				
<b>HKF 50</b>				
HKF 50 P	46	3.631-008.0	Spray head driven by a compressed air motor for the industrial container cleaning Cleaning of small barrels ( 200 - 500 l)	<input type="checkbox"/>
Spray head HKF 50, stainless steel	47	3.631-009.0		<input type="checkbox"/>
<b>WEED CONTROL</b>				
WR 50	48	2.114-013.0	In combination with a hot water high-pressure cleaner from Kärcher, the 50 cm wide weed remover WR 50 is ideal for removing weeds. It comes with an adaptive chassis and nozzle adapter.	<input type="checkbox"/>
WR 20	49	2.114-014.0	For thorough weed removal: The WR 20 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 20 cm wide nozzle bar and nozzle adapter.	<input type="checkbox"/>
WR 100	50	2.114-015.0	For thorough weed removal: The WR 100 weed remover for use with a hot water high-pressure cleaner from Kärcher. Equipped with a 100 cm wide nozzle bar and nozzle adapter.	<input type="checkbox"/>
WR 10	51	2.114-016.0	In combination with hot water high-pressure cleaners our WR 10 weed remover enables fast and thorough weed removal. With 10 cm spray head and nozzle adapter.	<input type="checkbox"/>
<b>QUICK CONNECT</b>				
Quick-fitting pipe union coupler trapezo	52	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	<input type="checkbox"/>
Quick-fitting pipe union plug nipple tra	53	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	<input type="checkbox"/>
<b>DRUM AND TANK CLEANING</b>				
Add-on kit mud sucker	54	2.641-798.0		<input type="checkbox"/>
<b>OTHER HP ACCESSORIES</b>				
Jet gun	55	2.869-067.0	Short set-up time, easy transport, instant switch off - the jet gun is the affordable cleaning method for all kinds of small to medium-sized areas. Adjustable pressure/water volume.	<input type="checkbox"/>
<b>FLUE PIPE</b>				
Flue gas adapter	56	4.656-149.0	Flue gas adapter with draught damper for flue pipe connection (adapter for HDS burners for connection to a stack system).	<input type="checkbox"/>

■ Included in delivery. □ Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>FLUE PIPE</b>				
Flue gas adapter	57	4.656-080.0	Flue gas adapter with draught damper for flue pipe connection (adapter for HDS burners for connection to a stack system).	<input type="checkbox"/>
<b>ROTARY NOZZLES (DIRT BLASTERS)</b>				
<b>Dirt blaster, large</b>				
Dirt Blaster Nozzle, large, 055/060	58	4.114-036.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>
<b>MULTIPLE-JET NOZZLES</b>				
<b>Angle vario nozzle 0°-90°</b>				
Angled Vario Nozzle, 055	59	4.113-008.0	Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces.	<input type="checkbox"/>
<b>STEAM NOZZLE / NOZZLE PROTECTOR / ROLLOVER NOZZLE</b>				
<b>Steam nozzle</b>				
Steam jet nozzle 50°	60	4.116-000.0	Steam jet nozzle with 50° fan jet. For cleaning and thawing in steam stage. For thawing sand and gravel, de-icing formwork material or de-waxing vehicles.	<input type="checkbox"/>
Steam jet nozzle 40°, 080	61	2.114-008.0	Brass steam nozzle for operation of the HDS in steam stage.	<input type="checkbox"/>
<b>NOZZLE UNION / SPACER</b>				
<b>Nozzle union</b>				
Nozzle screws	62	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	<input type="checkbox"/>
<b>PIPE CLEANING</b>				
<b>Pipe cleaning hose, ID 6</b>				
Hose assembly TR pipe cleaning DN6 max.2	63	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	64	6.110-008.0	20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	65	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	<input type="checkbox"/>
<b>Pipe cleaning nozzle</b>				
Dirt blaster pipe cleaning D21/060	66	4.765-002.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Dirt blaster pipe cleaning D30/060	67	4.765-005.0		<input type="checkbox"/>
Nozzle pipe cleaning size 120	68	5.763-089.0	Pipe cleaning nozzle with 24 mm diameter. With 8 nozzles tilted back at a 30° angle.	<input type="checkbox"/>
Pipe cleaning nozzle	69	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	70	5.763-016.0		<input type="checkbox"/>

Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>PIPE CLEANING</b>				
<b>Pipe cleaning nozzle</b>				
Pipe cleaning nozzle	71	5.763-021.0	30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
Rotating pipe cleaning nozzle	72	6.415-440.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
<b>FLOOR AND HARD SURFACE CLEANER</b>				
<b>Hard Surface Cleaner FRV 30</b>				
Add-on kit hose attachment	73	2.642-528.0	Suction cup for fixing the suction hose to smooth surfaces.	<input type="checkbox"/>
Add-on kit dirt trap	74	2.642-532.0	Galvanised steel bucket for collecting coarse dirt and for fixing the suction hose in outside areas.	<input type="checkbox"/>
<b>Hard surface cleaner FR 30 ME</b>				
FR 30 ME surface cleaner	75	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
<b>Hard Surface Cleaner FR 50</b>				
FR 50 surface cleaner	76	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
<b>Machine-specific nozzle kit for FR</b>				
Nozzle kit for FR, 850 l/h - 1100 l/h	77	2.640-442.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	<input type="checkbox"/>
<b>Machine-specific nozzle kits for FRV</b>				
Nozzle kit for FRV, 080	78	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	<input type="checkbox"/>
<b>Hard surface cleaner FRV 30 Me</b>				
Extension hose FRV 30 Me and FRV 50 Me	79	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	<input type="checkbox"/>
FRV 30 Me Surface Cleaner	80	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	<input type="checkbox"/>
<b>Surface Cleaner FR 50 Me</b>				
FRV 50 Me surface cleaner	81	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces. Hot water cleaning up to 85°C.	<input type="checkbox"/>
<b>FOAM SYSTEMS</b>				
<b>Cup foam lance</b>				
Cup foam lance Basic 3, 900 l/h - 2500 l/h	82	4.112-055.0	For high-pressure cleaners with a flow rate of 900-2500 l/h: new, robust and very high-quality foam cup lance with outstanding foam quality while consuming half as much cleaning agent.	<input type="checkbox"/>
1-litre cleaning agent container for cup foam lance basic	83	5.071-414.0		<input type="checkbox"/>
1-litre cleaning agent container for cup foam lance advanced	84	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	<input type="checkbox"/>

Available accessories.



## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



	Order no.	Description	
<b>FOAM SYSTEMS</b>			
<b>Cup foam lance</b>			
Cup foam lance Advanced 3, 900 l/h - 2500 l/h	85	4.112-065.0	<input type="checkbox"/>
Cup foam lance DUO Advanced 3, 900 l/h - 2500 l/h	86	4.112-069.0	<input type="checkbox"/>
<b>Inno Foam Set</b>			
Inno foam kit with detergent injector	87	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.
Inno foam kit	88	2.112-008.0	<input type="checkbox"/>
<b>Easy Foam Set</b>			
Easy Foam Set with RM injector	89	2.112-010.0	HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.
Easy foam set	90	2.112-011.0	<input type="checkbox"/>
<b>Nozzle kits for Inno/Easy Foam Set</b>			
Nozzle kit 110 Inno/Easy set 1000 - 1300 l/h	91	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.
<b>Foam nozzle mounting kit</b>			
Foam nozzle kit	92	2.112-013.0	Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.
<b>MIXERS AND INJECTORS</b>			
<b>HP detergent injector</b>			
Stainless steel injector kit for HDS 10/20-4M	93	6.645-762.0	Developed for the HD 10/20-4 M High-pressure cleaner, the stainless steel injector ensures optimal cleaning agent dosage. Supplied with suction hose and filter.
Detergent injector for high and low pressure (without nozzles)	94	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.
Detergent injector for high pressure	95	4.637-033.0	Cleaning agent dosage at high pressure 3 - 5 %
<b>Machine-specific nozzle kit with order no. 3.637-170</b>			
Nozzle insert trapezoidal thread	96	4.769-013.0	For HD/HDS 1000 - 1200 l/h. Consists of nozzle insert + HP power nozzle + union
<b>Nozzle insert with order no. 3.637-001</b>			
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	97	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.
Low pressure for units rated up to 1100 l/h	98	4.769-001.0	For low pressure with machines up to 1.100 l/h

Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



	Order no.	Description	
<b>COUPLING PARTS</b>			
<b>Rotary coupling</b>			
Rotary coupling	99	4.111-021.0 Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector Easy!Lock. With grip protection.	<input type="checkbox"/>
<b>Connector</b>			
Nozzle connector/screw connector	100	4.111-022.0 Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Y distributor	101	4.111-024.0 Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	<input type="checkbox"/>
Short spray unit	102	4.111-038.0 For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	<input type="checkbox"/>
<b>Adapter EASY!Lock</b>			
Adapter 1 M22AG-TR22AG	103	4.111-029.0 Adapter 1 to connect the old hose with the new hose	<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	104	4.111-030.0 Adapter 2 to connect the old device with the new hose and the old gun with the new hose	<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	105	4.111-031.0 Adapter 3 to connect the old gun with the new spray lance and new servo regulator	<input type="checkbox"/>
Adapter M22 - Swivel	106	4.111-032.0 M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	107	4.111-033.0 Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	108	4.111-034.0 Adapter 6 to connect the new device with the old hose and the old hose with the new gun	<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	109	4.111-035.0 Adapter 7 to connect the old spray lance with the new nozzle	<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	110	4.111-036.0 Adapter 8 to connect the new spray lance with the old nozzle	<input type="checkbox"/>
Coupler -2xM22x1,5	111	4.111-037.0 Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
ADAPTER for replacement TR22IG-M22AG Er	112	4.111-046.0 Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	<input type="checkbox"/>

Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>HOSE REELS</b>				
<b>Automatic, self-winding hose reels</b>				
Automatic plastic hose reel incl. high-pressure hose, 15 m	113	2.639-257.0		<input type="checkbox"/>
Automatic hose reel, powder-coated steel / plastic, 20 m	114	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic stainless steel / synthetic material hose drum, 20 m	115	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Automatic hose reel, coated, 20 m	116	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Hose reel, automatic, basalt grey-coated, 20 m	117	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses.	<input type="checkbox"/>
Automatic hose reel, stainless steel, includes swivel holder, 20 m	118	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Automatic stainless steel hose reel, 40 m	119	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	<input type="checkbox"/>
Powder-coated swivel holder	120	2.639-931.0	Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
Stainless steel swivel holder	121	2.641-867.0	Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>
<b>Anbausatz Schlauchtrommel automatik</b>				
Attachment kit automatic hose reel HDS M/S	122	2.110-011.0	Automatic hose reel as a complete attachment kit that's easy to mount. Suitable for HDS medium and super class. For maximum convenience when winding and unwinding the high-pressure hose.	<input type="checkbox"/>
Attachment kit automatic hose reel holder HDS M/S	123	2.110-020.0	Holder includes connection material for installing an automatic hose reel to machines in the HDS Middle and Super classes.	<input type="checkbox"/>
<b>FACADE AND SOLAR PANEL CLEANING</b>				
<b>Brushes</b>				
iSolar 800 Advanced	124	6.368-094.0	iSolar 800 water-driven brush head, 800 mm wide, for water flow rates of 700-1,000 l/h. With two contra-rotating disc brushes and flexible angle joint. For photovoltaic systems.	<input type="checkbox"/>
iSolar 400 Advanced	125	6.368-092.0	iSolar 400 brush for water flow rate of 700-1,000 l/h. The water-driven disc brush with a width of 400 mm cleans small to medium-sized photovoltaic systems. Also perfect for use on elevated systems.	<input type="checkbox"/>
Drive for roller brush 500	126	4.762-584.0	Hydraulic drive for rotating roller brushes. For cleaning façades or solar power installations with our professional high-pressure cleaners. Installation on spray lance or telescopic lance.	<input type="checkbox"/>

Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



	Order no.	Description		
<b>FACADE AND SOLAR PANEL CLEANING</b>				
<b>Brushes</b>				
Splash guard for roller brush 500	127	4.762-621.0	Splash guard with velcro fastening for rotating roller brush. Clear view of the brush thanks to transparent film, with protection against splashes at the same time.	<input type="checkbox"/>
Roller brush 500 soft	128	4.762-623.0	Soft brush attachment for use with hydraulic drive (4.762-584.0). Ideal for glass and solar power installation cleaning. Easy quick-change system and secure mounting on drive.	<input type="checkbox"/>
Roller brush 500 medium	129	4.762-624.0	Medium-hard brush attachment for use with hydraulic drive (4.762-584.0). Suitable for sensitive façades, foils and fabrics. Easy and safe quick-change system.	<input type="checkbox"/>
Roller brush 500 hard	130	4.762-625.0	Hard brush attachment for use with hydraulic drive (4.762-584.0). For rough façades, stone and wooden patios. Safe and easy quick-change system.	<input type="checkbox"/>
Brush hard	131	6.960-133.0	Brush with hard bristles for cleaning industry façades and floor coverings and removing coarse dirt. Simple installation on telescopic lances or high-pressure lances from Kärcher.	<input type="checkbox"/>
Brush medium	132	6.960-134.0	Optimally cleans façades, roller shutters and textile fabrics: the brush with medium-hard bristles for fast and simple attachment to telescopic lances or high-pressure lances from Kärcher.	<input type="checkbox"/>
Brush soft	133	6.960-135.0	For simple installation on telescopic lances or high-pressure lances from Kärcher: brush with soft bristles for deep cleaning of sensitive surfaces such as glass or solar systems.	<input type="checkbox"/>
<b>Telescopic</b>				
Telescopic rod complete 14m	134	4.110-002.0	Full carbon telescopic rod for maximum rigidity with minimal weight. With 14 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m CFK	135	4.110-007.0	The full carbon telescopic lance offers maximum rigidity with minimal weight. It has a reach of up to 10 m and is fitted with practical quick-release couplings - for convenient extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m	136	4.110-003.0	Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 10 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
iSolar TL 7 H (without hose)	137	4.110-004.0	Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 7.2 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
TL low pressure adapter	138	4.580-097.0	TL low-pressure adapter comprising ball valve for tool-free installation on telescopic lances. Ideal for applications with rotating high-pressure brushes.	<input type="checkbox"/>
Telescopic lance TL 7 F	139	4.762-609.0	Telescopic lance TL 7 F with up to 7 m reach made from robust and lightweight glass fibre. With practical quick-release fasteners for simple retraction and extension.	<input type="checkbox"/>
Telescopic lance TL 7 H	140	4.762-610.0	Multifunctional hybrid telescopic lance TL 7 H made of rigid and lightweight carbon-glass fibre mix. Telescopic thanks to quick-release fastenings. Up to 7 m reach.	<input type="checkbox"/>

Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



	Order no.	Description		
<b>FACADE AND SOLAR PANEL CLEANING</b>				
<b>Telescopic</b>				
Telescopic lance TL 10 H	141	4.762-611.0	Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	<input type="checkbox"/>
Telescopic lance TL 10 C	142	4.762-612.0	Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	<input type="checkbox"/>
Telescopic lance TL 14 C	143	4.762-613.0	Maximum rigidity with minimum weight: telescopic lance TL 14 C made from carbon fibre. Enormous reach of 14 m, multifunctional use and easy to use thanks to quick-release fasteners.	<input type="checkbox"/>
TL high pressure adapter	144	4.775-154.0	TL high-pressure adapter, flexible high-pressure gun for high-pressure cleaning with telescopic lances. Ergonomic, easy to install, suitable for right- and left-handed individuals.	<input type="checkbox"/>
<b>Wasserenthärtung</b>				
WS 50	145	6.368-463.0	The mobile WS 50 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water.	<input type="checkbox"/>
WS 100	146	6.368-464.0	The mobile WS 100 water softening unit prevents lime residue on clean surfaces. A special ion-exchange resin removes the dissolved limescale from the water.	<input type="checkbox"/>
WS Regenerator	147	6.368-465.0	With the WS Regenerator regeneration system, the softening cartridges of the water softening units WS 50 and WS 100 can be backflushed and regenerated at the push of a button.	<input type="checkbox"/>
<b>Hoses</b>				
Hose solar	148	6.392-978.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	149	6.392-977.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	150	6.392-976.0	High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
<b>Attachment kits and adapters</b>				
Case sheet steel	151	6.988-152.0	Certified personal security system for rooftop work. Contents: Travelling fall arrestor with shock absorber and 15 m kernmantle rope, harness, anchoring sling and sheet steel case.	<input type="checkbox"/>
<b>WET BLASTING ATTACHMENT</b>				
<b>Wet blasting attachment (without nozzle)</b>				
Wet blasting attachment with flow control (without nozzles)	152	4.115-000.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	153	4.115-006.0	Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
<b>Nozzle pack for wet blasting attachment</b>				
Nozzle pack TR wet jet set 0055	154	2.112-024.0	Consisting of wet jet nozzle and nozzle insert - only for use in combination with wet jet unit 4.115-000.0   4.115-006.0.	<input type="checkbox"/>

Available accessories.



## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>WET BLASTING ATTACHMENT</b>				
<b>Boron carbide nozzle</b>				
Boron carbide nozzle, for machines as of 1000 l/h	155	6.415-084.0	In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>
<b>DRUM AND TANK CLEANING</b>				
<b>Barrel and tank cleaning</b>				
Barrel cleaner BC 14/12	156	2.112-020.0	The barrel cleaner BC 14/12 is a spray unit for the internal cleaning of containers and drums - in particular oak barrels with a capacity between 225 and 600 liters.	<input type="checkbox"/>
<b>HKF 50 spray head, brass</b>				
HKF 50 spray head, brass	157	3.631-039.0	Interior cleaning head for barrels and containers with bungholes of 50 mm and more.	<input type="checkbox"/>
HKF 50 spray head, brass	158	3.631-058.0		<input type="checkbox"/>
<b>Nozzle kit for HKF 50 spray head (3.631-009.0 / 3.631-039.0)</b>				
Nozzle 045 for dual nozzle operation HKF 50	159	6.415-446.0	Nozzle for dual-nozzle operation	<input type="checkbox"/>
Nozzle 090 for single nozzle operation HKF 50	160	6.415-447.0	Nozzle for single-nozzle operation	<input type="checkbox"/>
Double handle for exact control of the spray head	161	2.863-036.0	Double handle. Precise control of the spray head	<input type="checkbox"/>
Screw plug for using a spray head with one nozzle	162	5.411-061.0	Screw plug for using a spray head with one nozzle	<input type="checkbox"/>
<b>ADD-ON KITS</b>				
<b>Crane lifting kit</b>				
Transport eyelet attachment kit	163	2.644-053.0	Robust transport eyelet attachment kit for the secure fixing of HDS Medium and Super Class pressure washers during transport.	<input type="checkbox"/>
<b>Flame monitoring attachment kit</b>				
ABS flame monitor for HDS M/S	164	2.641-796.0	More safety thanks to ABS HDS M/S flame monitoring system: A light sensor monitors the burner flame. The fuel supply cuts out automatically if the flame extinguishes.	<input type="checkbox"/>
<b>Accumulator kits</b>				
Add-on accumulator for HDS M/S	165	2.641-803.0	The accumulator can be mounted on the HDS machine in order to dampen pressure surges, which conserves the machine's line system.	<input type="checkbox"/>
<b>Remote control set</b>				
Remote control set	166	2.642-157.0	Remote control for the machines of the HDS Middle and Super class with the functions on/off, hot/cold water and cleaning agent on/off. For mounting to a wall.	<input type="checkbox"/>
<b>Coin-op remote control</b>				
Coin-op remote control	167	2.642-158.0	Retrofittable coin acceptor for machines in the HDS Middle and Super class for self-service operation. For installation on the machine.	<input type="checkbox"/>
<b>WATER CONNECTION</b>				
<b>Geka coupling</b>				
With hose nozzle, R 3/4"	168	6.388-455.0	with hose liner	<input type="checkbox"/>

Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



	Order no.	Description	
<b>WATER CONNECTION</b>			
<b>Geka coupling</b>			
With hose nozzle, R 1"	169	6.388-465.0 with hose barb	<input type="checkbox"/>
Hose coupling	170	6.388-458.0 with female thread	<input type="checkbox"/>
<b>Suction filter</b>			
Water filter	171	6.414-956.0 Suitable for ponds, storage tanks or similar, polyamide filter casing, stainless steel strainer, 800 µm mesh, R 3/4" and R 1" connection, without non-return valve	<input type="checkbox"/>
Suction filter with check valve	172	4.730-012.0 Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
<b>Fine-mesh water filter</b>			
Add-on kit water filter universal	173	2.637-020.0	<input type="checkbox"/>
Fine-mesh water filter with adapter	174	4.730-102.0 Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Fine-mesh water filter, 100 µm, R 1"	175	2.638-270.0 Fine-mesh water filter, 100 µm, max. temperature 60°C. Connects to high-pressure cleaner. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connector 1".	<input type="checkbox"/>
<b>Water supply hose</b>			
Water supply hose	176	4.440-207.0 NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
	177	4.440-270.0 NW 19 R1" / R1", up to 85 °C	<input type="checkbox"/>
<b>Backflow check valve</b>			
Backflow preventer	178	2.641-374.0 To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>
<b>WASHING BRUSHES</b>			
<b>Push-on washing brush</b>			
Push-on wash brush, M 18 × 1.5	179	4.113-001.0 Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 × 1.6.	<input type="checkbox"/>
<b>Rotating washing brush</b>			
Rotating wash brush for > 800 l/h machines, nylon bristles	180	4.113-002.0 Driven by water stream. Gently removes fine dust and traffic film from any surface. Temperature resistant up to 60°C, M 18 × 1.5 (replaceable brush insert).	<input type="checkbox"/>
Rotating wash brush for > 800 l/h machines, natural bristles	181	4.113-005.0	<input type="checkbox"/>
<b>HOSE REELS</b>			
Automatic hose reel, powder-coated steel / plastic, 20 m	182	9.549-009.0	<input type="checkbox"/>

Available accessories.

## EQUIPMENT FOR HDS 10/20-4 M 1.071-900.0



		Order no.	Description	
<b>SPRAY LANCES</b>				
Flexible lance, 1050 mm	183	9.549-017.0		<input type="checkbox"/>

Available accessories.