KARCHER

NT 65/2 AP

Powerful, twin-motor wet & dry vacuum for professional applications. Featuring the Ap semi-automatic filter clean system for contasntly high suction power.

Order no.

1.667-297.0


- Semi-automatic filter cleaning system
- Flat pleated filter (dust class M)
- Drain hose and push handle

Technical data		
EAN code		4039784727342
Current type	Ph / V / Hz	1 / 220 - 240 / 50 - 60
Air flow	I/s	2 × 74
Vacuum	mbar / kPa	254 / 25.4
Container content	I	65
Container material		Plastic
Rated input power	W	max. 2760
Standard nominal size		ID 40
Cable length	m	10
Sound pressure level	dB(A)	73
Weight without accessories	kg	20
Dimensions (L × W × H)	mm	567 × 482 × 920
Cable length Sound pressure level Weight without accessories	dB(A) kg	10 73 20

Equipment		
Suction hose	m	4 / with bend
Suction Tube	Piece(s) × m	2 × 0.5 / Metal
Filter bag		Paper
Wet and dry floor tool	mm	360
Crevice nozzle		
Drain hose (oil-resistant)		
Auto shutdown when max. level is reached		•
Flat pleated filter		Paper
Sturdy bumper		
Push handle		
Safety class		II
Caster with brake		

Included in delivery.

KARCHER

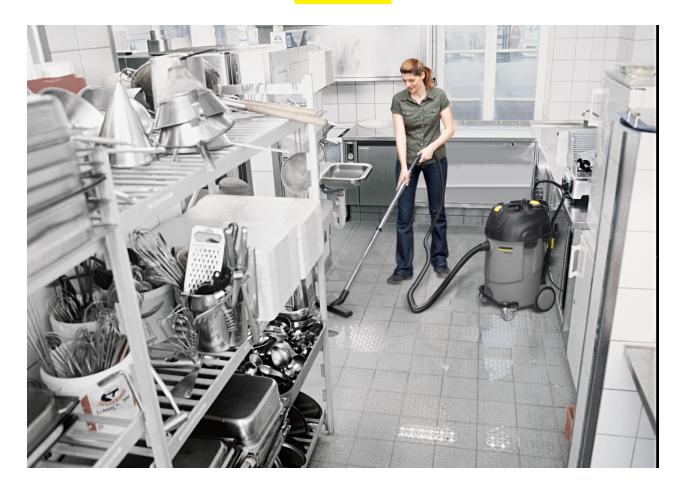



On-board practical storage

 Large on-board storage area for tool and accessory storage.



Semi-automatic filter cleaning system

- The free filter means that the user can work for long intervals without interruption.
- Optimal suction power with high efficiency.

Integrated drain hose (oil-resistant)

• Easily accessible drain hose for convenient liquid disposal.

KARCHER



















	_			_
		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR U	Р ТО С	UST CLASS M		
Flat pleated filter (paper)				
Flat pleated filter	1	6.904-283.0	Paper flat pleated filter (BIA-(U,S,G,C) dust class M) suitable for NT 65/2 Eco, NT 65/2 Eco Tc, NT 65/2 Eco Me.	-
Flat pleated filter (PES)				
Flat filters (PES)	2	6.904-284.0	Flat filter (PES) – BIA-(U,S,G,C) dust class M: rotproof polyester fleece, ideal for wet use and abrasives. Standard for NT 72/2 Eco Tc.	
BENDS				
Plastic bend				
Elbow packaged NW40 1K	3	2.889-171.0	Bend for the new clip system in nominal size DN 40.	
Plastic bend	4	5.031-718.0	Plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models (except NT Eco M and NT Eco H).	
	5	5.031-939.0	Electrically conductive plastic bend (DN 35) with C-35 clip system. For all industrial single-motor NT 361 to NT 611 Eco models.	
	6	5.032-427.0	Electrically conductive plastic bend (DN 40) with C-40 clip system, suitable for all NT vacuum cleaners.	
Elbow electrically conducting packaged N	7	2.889-148.0	Ergonomic bend for the new clip system. With airflow control slide, in an antistatic design.	
Bend metal	•			
Bend, DN 35, metal	8	6.900-519.0	Robust, chromium-plated metal bend (DN 35), can be used instead of a plastic bend (with clip system adapter 5.407-112.0, C 35-DN 35, plastic, el.).	
Bend, stainless steel ID 35	9	6.903-141.0	Stainless steel and crooked, ID 35	
Bend, DN 40, metal	10	6.900-276.0	Robust, chromium-plated metal bend (DN 40), can be used instead of a plastic bend (with clip system adapter 5.407-111.0, C 40-DN 40, plastic, el.).	
Bend, stainless steel ID 40	11	6.902-079.0	Stainless steel and crooked, ID 40	
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool packaged NW40 360mm	12	2.889-153.0		
Floor tool DN40-370	13	6.903-018.0	All-purpose aluminium nozzle with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners	j. 🗆
Floor tool neutrally DN40	14	6.906-383.0	All-purpose aluminium nozzle (DN 40) with 450 mm working width. With height-adjustable side rollers, brush strips (6.903-065.0) and oil-resistant squeegees (6.906-146.0). Only for NT vacuum cleaners.	

 $[\]blacksquare$ Included in delivery. \qed Available accessories.

























				\top
		Order no.	Description	
SUCTION NOZZLES				
All-purpose nozzles (wet/dry)				
Floor tool neutrally DN35	15	6.906-384.0	All-purpose aluminium nozzle (DN 35) with 370 mm working width. With height-adjustable side rollers, brush strips (6.903-064.0) and oil-resistant squeegees (6.903-081.0). Only for NT vacuum cleaners.	
Wet and dry floor nozzle	16	2.889-117.0	The wet and dry floor nozzle (DN 40) allows quick changing of the squeegees/brush and is ideal for wet vacuum cleaning of large areas.	. 🗆
Crevice nozzles				
Crevice nozzle DN 40 300mm 1:50	17	5.130-655.0		
Crevice nozzle DN35	18	6.900-385.0	Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 210 mm.	
Crevice nozzle	19	6.900-922.0	Plastic crevice tool (DN 35) for vacuuming in crevices and corners. Length: 370 mm.	
Crevice nozzle DN40	20	6.905-817.0	Metal crevice tool (DN 40) for vacuuming in crevices and corners. Length: 400 mm.	
All-purpose brushes	'			
All-purpose brush	21	6.903-863.0	Natural bristles (ox hair), bristle element 120 × 45 mm.	
Car cleaning nozzles				
Car nozzle packaged NW 40	22	2.840-095.0		
Car nozzle	23	6.900-952.0	Angled, flat, plastic car vacuuming tool with about 90 mm working width. Only for NT vacuum cleaners.	
Rubber suction tools, nose 45°				
Rubber suction tools, nose 45°	24	6.902-104.0	45° rubber suction nozzle (DN 35), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	
	25	6.902-105.0	45° rubber suction nozzle (DN 40), oil-resistant and suitable for vacuuming machines. Only for NT vacuum cleaners.	
Pipe dusting nozzles	'			
BRUSH	26	6.903-035.0	Plastic, pipe diameter 100 mm	
	27	6.903-036.0	Plastic, pipe diameter 200 mm	
Suction brushes				
Suction brush DN35	28	6.903-862.0	Rotatable suction brush (DN 35) with natural bristles (cow hair). Bristle size 70x45 mm. Only CV and NT vacuum cleaners.	

 $[\]blacksquare$ Included in delivery. \qed Available accessories.



























				Т
		Order no.	Description	
SUCTION TUBES				
Suction tubes stainless steel				
Set suction tube stainless steel NW40 55	29	2.889-194.0	Stainless steel suction tube set (2 × 0.55 m)	
Suction tube, ID 40	30	6.902-081.0	Stainless steel suction tube (DN 40, 0.5 m) only suitable for NT vacuum cleaners.	I
Suction tube	31	6.906-531.0	Stainless steel suction tube (DN 40, 1.0 m) only suitable for NT vacuum cleaners.	T
Suction tube, DN 35	32	6.902-154.0	0.5 m long stainless steel suction tube (ID 35) for wet and dry vacuum cleaners. Ideal for frequent wet vacuuming applications and for vacuuming corrosive components.	
Suction tubes metal				
Suction tube DN35	33	6.900-514.0	Chromium-plated metal suction tube (DN 35, 1x0.5 m), standard for virtually all single-motor industrial NT vacuum cleaners.	
SUCTION HOSES				
Suction hoses with clip system 2.0 (compat	ible with	vacuum cleane	rs from model year 2017 on)	l,
Suction hose	34	2.889-138.0	4 m suction hose with new bayonet and clip fastener.	
Electrically conductive suction hose	35	2.889-137.0	4 m suction hose with new bayonet and clip fastener. Electrically conductive.	
Suction hose	36	2.889-139.0	Suction hose with new bayonet and clip fastener. Length: 2.5 m.	T
Suction hose, oil-resistant	37	2.889-140.0	Oil-resistant suction hose with new bayonet and clip fastener. Length: 4 m.	
Electrically conductive suction hose	38	2.889-141.0	4 m, electrically conductive suction hose with new bayonet and clip fastener.	T
	39	2.889-142.0	Suction hose, electrically conductive, with new bayonet and clip fastener. 2.5 m long.	T
Extension hose packaged NW40 2.5m	40	2.889-146.0	Extension hose for new clip system ID 40. Length: 2.5 m.	
Repair kits				Ť
Repair set, C 40	41	2.639-873.0	Repair set (C40) includes threaded hose adapters (without bayonet adapter) for industrial NT vacuum cleaners with clip system.	
Repair kit ID 61	42	2.862-038.0	Suction hose repair kit. Optional for all NT 65/2 and 72/2, NT 993 I, NT 802 I.	T

 $[\]blacksquare$ Included in delivery. \qed Available accessories.



























		Order no.	Description	
SUCTION HOSES				
Repair kits				
Repair set NW40	43	2.889-150.0	Repair kit ID 40 for the new clip system.	
Hose connection				
Adapter, DN 32/35, with internal thread	44	6.902-077.0	Electrically non-conductive adapter with internal thread. For connecting two suction hoses without connectors. Suitable for DN 32 or DN 35.	: 🗆
Adapter, DN 40 with internal thread	45	6.900-286.0	Electrically non-conductive adapter with screw thread at both ends. For connecting 2 DN 40 suction hoses without connectors.	
Suction hoses with clip system 1.0 (compatible	with	vacuum cleane	ers up to model year 2016)	
Extension hose, C 40	46	6.906-344.0	2.5 m electrically non-conductive standard extension hose for all C-40 hoses with clip system.	
Suction hose	47	4.440-678.0	4 m electrically non-conductive suction hose with bend, bayonet at vacuum end and C 40 clip connection at accessory end. Without module.	
Suction hose (clip system), C 40, 10 m	48	6.906-279.0	10 m standard suction hose without bend and adapter. With bayonet at vacuum end and C 40 clip connection at accessory end.	
Suction hose	49	6.906-321.0	4 m suction hose with bayonet and C 40 clip connection. Without bend and adapter.	
	50	6.906-714.0	With bayonet and clip connection.	
Suction hose, complete (clip system), C DN 40, 4 m	51	4.440-679.0	4 m electrically non-conductive suction hose with bend (C-DN 40) and module (4.060-474.0), bayonet at vacuum end and C 35 clip connection at accessory end.	
Suction hose complete (Clip-system), C ID 40, 4 m, el.	52	4.440-728.0	With bend and module (4.060-533.0), electrically conductive.	
Suction hose (Clip-system), C 40, 16 m	53	6.906-635.0	With bayonet and clip connection.	
Suction hose (clip system), C 40, 10 m, el.	54	6.906-877.0	Suction hose with bayonet coupling, electrically conductive.	
Suction hoses with cone connection				
Suction hose, complete	55	4.440-264.0	4 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end.	
Suction hose complete, ID 61, smooth inside	56	4.440-328.0	Industrial hose, PVC/elastomer with steel spiral, smooth inside.	
		•	·	

 $[\]blacksquare$ Included in delivery. $\hfill\Box$ Available accessories.

























				_
		Order no.	Description	
SUCTION HOSES		<u> </u>		Ť
Suction hoses with cone connection				
Suction hose, complete, DN 61, 10 m	57	4.440-467.0	10 m standard suction hose with DN 61 bayonet at vacuum end and DN 61 cone at accessory end.	
Suction hose complete, ID 61, 4 m, oil-resistant	58	4.440-613.0	Oil-resistant.	
Suction hose complete, ID 61, 4 m, el.	59	4.440-616.0	Electrically conductive.	
Suction hose, complete	60	4.440-263.0	Electrically non-conductive 4.0m standard suction hose with bayonett at vacuum end and DN 40 cone at accessory end.	[
Suction hose complete, ID 40, 4 m, oil-resistant,	61	4.440-303.0	Oil-resistant.	
Suction hose, complete	62	4.440-463.0	Electrically non-conductive 10.0m standard suction hose with bayonett at vacuum end and DN 40 cone at accessory end.	
Suction hose complete	63	4.440-466.0	Electrically conductive, 10.0m, ID 40	Г
Suction hose complete, ID 40, 10 m, oil-resistant	64	4.440-612.0	Oil-resistant.	
FILTER T/ NT				
Flat pleated filter HEPA, dust class H				
HEPA surface filter	65	6.904-364.0	HEPA surface filter – dust class H (H 14) – with glass-fibre layers increases filter capacity when vacuuming health-endangering and carcinogenic dust.	
Special filter bags, wet filter bags				
Special filter bags, wet filter bags	66	6.904-252.0	Approved for dust class L, general cleaning, wet and dry, tear-resistant.	
Plastic sacks for dust-free disposal				
Plastic bag for dust-free disposal, 10 \times , NT 65, NT 70, NT 72, NT 75, NT 602, NT 700, NT 702	67	6.900-698.0	PE plastic sack.	
Membrane filter / fabric filter				
Membrane filter, NT 65, NT 70, NT 72, NT 75, NT 551, NT 602, NT 700, NT 702, NT 802, NT 993	68	6.904-282.0	Polyester needle fleece membrane/fabric filter - BIA-C -, washable up to 40°C, metal fibres for earthing. Suitable for virtually all industrial two-motor NT vacuum cleaners.	
Candle Filter - Wood, NT 65/2, NT 75/2	69	2.414-003.0		Ε
Fleece filter bags (3 ply)		•		T
Fleece filter bags, 5 \times , NT 65, NT 70, NT 72, NT 75	70	2.885-753.0		
Available accessories			•	

[☐] Available accessories.























				T
		Order no.	Description	l
CONNECTING SLEEVES				
Y-adapter kit				
Y-adapter kit	71	2.637-217.0	Plastic distributor – suitable for NT vacuum cleaners.	
Connecting sleeve C-DN (clip on taper), EL (elec	troco	nductive)		
C-ID 35 adapter	72	5.407-112.0	Connects C 35 hose for ID 35, electrically conductive.	
C 40 adapter	73	5.407-109.0	Electrically conductive adapter (C 40) with DN 35 connection for connecting DN 35 accessories to an industrial C 40 or C-DN 40 suction hose. Suitable for NT vacuum cleaners.	
C-DN 40 adapter	74	5.407-111.0	Connects C 40 hose for ID 40, electrically conductive.	
Connection cone NW35	75	5.407-005.0		
Connection cone NW40	76	5.407-006.0		
Adapter for electric power tools, clip on, el.				
Sleeve for tool C35EL	77	5.453-042.0	3-way plastic adapter. For DN 26 to DN 36. For connecting power tools to an industrial C or C-DN 35 suction hose. Suitable for NT vacuum cleaners.	
Adapter for electric power tools, C 35, el.	78	5.453-048.0	Inner Ø 25.4 mm, outer Ø 34.6 mm/ 38 mm, el. Only NT-vacuums.	Г
	79	5.453-050.0	Inner Ø 27 mm, outer Ø 36.5 mm/ 38.8 mm, el. Only NT-vacuums.	Г
Adapter for electric power tools, screwable				Ť
Power tool adapter, threaded, DN 35	80	5.453-016.0	3-way plastic adapter with fitting instructions. For DN 26 to DN 36. For connecting to an industrial DN 35 suction hose.	
Adapter for electric power tools, screwable, ID 35	81	5.453-026.0	Inner Ø 28.6 mm, outer Ø 37.3/38.8 mm.	
Power tool adapter, threaded, DN 35	82	6.902-059.0	Electrically conductive power tool adapter, threaded. Internal diameter: 32 mm.External diameter: 39 mm.	
	83	6.902-095.0	2-way power tool adapter, threaded. For connecting to an industrial DN 35 suction hose. Internal diameter: 28 mm.External diameter: 34 mm and 38.8 mmSuitable for NT vacuum cleaners.	
Adapter (tube -> nozzle)		•		
Adapter	84	5.453-019.0	From DN 40 to DN 61: Plastic adapter (electrically non-conductive). Suitable for NT vacuum cleaners.	

 $[\]hfill\square$ Available accessories.

























		Order no.	Description	L	
CONNECTING SLEEVES					
Reducing sleeves		,			
Reducer	85	5.407-108.0	Threaded reducer – from C-40 to DN 35. Suitable for NT vacuum cleaners.		
Sleeve C40 / C35	86	5.407-113.0	Reducer (C 40 to C 35) for connecting accessories with C- 35 clip connection to suction hoses with C 40 clip system.		
Reducer (tube -> nozzle)					
Reducer	87	6.902-017.0	Reducer for accessory extension. Ideal for accessories with DN 35 connecting cone in combination with accessories with DN 40 connecting cone.		
Reducer from ID 35 to 32	88	6.902-072.0	Reducer with internal connecting cone DN 32. Ideal for accessories from the industrial vacuum cleaner range in combination with industrial NT vacuum cleaners.		
Set reducing / extension sleeves					
Set reducing / extension sleeves	89	2.860-117.0	ID 40/35, ID 35/32 (tube -> nozzle), plastic.		
TARGET GROUP SPECIFIC VACUUM CLEANER	ACCESS	ORY SETS			
Professional cleaning kit ID 40	90	2.637-353.0	Individual parts: Suction hose 4 m (4.440-263.0), bend, metal (6.900-276.0), suction tube 2 \times 0.5 m metal (6.900-275.0), grout nozzle (6.903-033.0), floor nozzle with rollers (6.903-051.0).	, [
Car cleaning kit	91	2.862-166.0	Contains: - Car cleaning nozzle ID 35 - Upholstery/crevice tool ID 35 - Suction brush ID 35 - Connecting sleeve C 35/ ID 35		
Chip cleaning kit	92	2.640-760.0	Individual parts: suction hose 4 m, oil-proof (4.440-613.0), crevice tool (6.900-222.0), rubber suction nozzle angled at 45° (6.902-106.0).		
OTHER ACCESSORIES FOR T AND NT					
CS 40 Me	93	2.863-026.0	The highly efficient CS 40 Me cyclone preseparator for all Kärcher wet and dry vacuum cleaners is a specially designed accessory for fine dust applications on construction sites or in industry.		
Adapter connection old elektr. leitend	94	5.031-436.0			
UBS NON-CONDUCTIVE MEDIA					
Add-on kit nonconducting media NT Tact²	95	2.642-602.0	For switching off when vacuuming non-conductive fluids such as oils and greases	Е	
OTHER ACCESSORIES FOR SCRUBBER DRYER	lS .			Ė	
Miscellaneous					
Extension cable	96	6.647-022.0	Extension cable, 20 m, 3x1.5 mm². With splash-proof earthing pin plug, strain relief and anti-kink sleeve.		
☐ Available accessories.		-		_	

 $[\]hfill \square$ Available accessories.